



WEST BENGAL STATE ELECTRICITY DISTRIBUTION COMPANY LIMITED

(A Government of West Bengal Enterprise)

CIN : U40109WB2007SGC113473

VIDYUT BHAVAN, BIDHANNAGAR, KOLKATA-91

WBSEDCL

Office Order No: CED/U.G Cable Rate Contract/ 07

Dated: 25.02.2020

Subject: Revision of existing "Rate Contract" for erection, laying and maintenance of underground electrical network system throughout the jurisdiction of WBSEDCL except hill area up to 11 KV System.

Ref: Previous O.O No: CED/U.G Cable Rate Contract/69 dated 01.10.2015 of the Director (HR): WBSEDCL read with Corrigendum Office Order No: CED/U.G Cable Rate Contract/Corrigendum/04 dated 12.04.2016 of the Director (HR): WBSEDCL.

Ref: Previous Extension vide O.O No: 30 dated 30.09.2019 of the Director (HR): WBSEDCL

Ref: Previous Extension vide O.O No: 04 dated 21.01.2020 of the Director (HR): WBSEDCL

The existing "Rate Contract" for erection, laying and maintenance of underground electrical network system throughout the jurisdiction of WBSEDCL except hill area up to 11 KV System issued vide Office Order No: CED/U.G Cable Rate Contract/69 dated 01.10.2015 of the Director (HR): WBSEDCL was valid for 3 (three) year from effective date i.e from 01.10.2015. Subsequently the stated rate contract has been extended up to 31.12.2019 vide O.O No 30 dated 30.09.2019 and up to 31.01.2020 vide O.O No 04 dated 21.01.2020 of the Director (HR): WBSEDCL. Now, it is felt necessary for revision of rates considering the enhancement of the rate of the minimum wages of labour rate, alteration of transportation charges, construction materials and other relevant input costs and to develop standard and uniform drawings of some items and for introduction of some major items related to U.G electrical network to match with the present system and requirement of the WBSEDCL. The scope of work is to be extended throughout the jurisdiction of the company except hilly areas up to 11 KV system for different forthcoming schemes of the company throughout the state of West Bengal.

Accordingly the revised "Rate Contract" is being enforced with effect from 01.02.2020 superseding the previous "Rate Contract" order issued vide O.O No: CED/U.G Cable Rate Contract/69 dated 01.10.2015 of the Director (HR): WBSEDCL.

The Schedule of work for "Rate Contract" is enclosed herewith vide **Annexure-"X"**.

The rates of Kiln Burnt 1st class bricks for execution of work in different Districts against item no 8 of **Schedule of Works (S.O.W)** is enclosed vide **Annexure-"P"**.

The detail scope of "**Micro Tunnelling**" works against item no 47 of S.O.W is enclosed vide **Annexure-"S"**

The standard and uniform drawings of some items vide no 10, 15, 16, 18, 34, 50 & 51 of S.O.W vide nos PLN (D)/SS/101, 102, 104, 105, 106, 107 & 108, 132, 133, 137 are also annexed herewith.

The following terms and conditions shall be observed inter-alia:

- i. The rates of different items of the Schedule of Works are firm & inclusive of Transportation of the departmental materials from the nearest stores of WBSEDCL to the work site up to 5 (Five) KM, the cost of all materials (where mentioned in item of works), labour, Insurance of departmental materials (as applicable), other incidental charges etc. **but excluding GST and BOCW Cess , as applicable as per rule, will be paid extra by the WBSEDCL.**
- ii. Deduction of Income Tax will be made as per the provision of Income Tax Act.
- iii. The Schedule of rates of this "Rate Contract" is valid up to **3 (Three) years from the effective date of the revised rate contract order i.e w.e.f 01.02.2020.**
- iv. The contractors enlisted under Distribution Head Quarters & Distribution RE Wing for Electrical Installations shall only be engaged for this work. However deployment of contract by turn or rotation shall be made considering past tract record and satisfactory performance of the contractor.
- v. The contractor must have PF registration number & ESI in their own name (in case of ESI notified area).
- vi. The contractor must have valid Electrical License/ Supervisory License.
- vii. The contractor shall ensure compliance of statutory provisions as laid down in various Labour Laws.
- viii. No sub-letting of contract will be allowed to the Contractor for execution of the work.
- ix. Individual Purchase order shall be placed with the contractor observing usual terms and conditions as per standard erection contract of WBSEDCL.
- x. The financial power for placement of execution order shall be guided by the present "Schedule of Delegation of Power" of WBSEDCL issued vide O/O no. 1011, dt.04.11.2015 of the Director (HR) and its subsequent modifications/revisions.
- xi. **The rate is applicable for the works having financial involvement of labour and agency/party supply material (under coverage of this rate contract) up to 5(Five) lakhs only for each work. As per e-tender policy of the company [Vide O.O No 901 dt 10.11.2014 of the Director (HR) and subsequent modifications], e-tender may be floated of the work volume having value more than 5 (Five) lakhs. However, if required e-tendering may also be done for the work value below 5.00 lakhs as per discretion.**

This is issued with the approval of the CMD dated 05.02.2020



(Sujay Sarkar)
Director (HR)
WBSEDCL

Distribution

Memo. No. **CEO/1361 (i- cxi)**

Dated- **25.02.2020**

01. The Director : (Distribution): WBSEDCL : VidyutBhavan : Kolkata- 91.
02. The Chief Engineer: IT&C/ CRM/RE-HQ/ Commercial: WBSEDCL.
03. The General Manager (HR&A) / (F&A) : Corporate : WBSEDCL : VidyutBhavan : Kolkata- 91.
04. The Addl. General Manager (HR&A) / (F&A) : Distribution/Legal : WBSEDCL : VidyutBhavan: Kolkata- 91.
05. The Addl. General Manager (F&A)-DistRevenue : Distribution/Legal : WBSEDCL : VidyutBhavan: Kolkata- 91.
06. The Zonal Manager : Kolkata/ Burdwan/ Midnapore/ Berhampore/ Siliguri Zone : WBSEDCL
07. The Regional Manager :
Bidhannagar/ 24-Prgs.(North)/ 24-Prgs.(South)/ Howrah/ Hooghly/ Burdwan/ Birbhum/
PurbaMidnapore/ PaschimMidnapore/ Bankura/ Purulia/ Malda/ Murshidabad/ Nadia/ Darjeeling/
Jalpaiguri/ Uttar-Dinajpur/Dakhin-Dinajpur/ Coochbehar/ Alipurduar Regional Office, WBSEDCL.
08. The Divisional Manager :
Bidhannagar- I/ Bidhannagar- II/New Town Division/Bhangar/Barrackpore/ Naihati/ Barasat/
Basirhat/ Bongaon/ Habra/ Uluberia/ Howrah-I/ Howrah- II/ Behala/ Garia/ Baruipore/ Canning/
Diamond Harbour/ Kakdwip/ Serampore/ Chandannagar/ Tarakeswar/ Arambag/ Singur-Haripal/
Mogra/ Memari/ Burdwan Urban/ Burdwan Rural/ Katwa/ Kalna/ Durgapur/ Asansol/ Rampurhat/
Suri/ Bolpur/ Kharagpur/ Belda/ Jhargram/ Midnapur/ Ghatal/ Contai/ Egra/ Haldia/ Tamluk/ Bankura/
Bishnupur/ Khatra/ Purulia/ Raghunathpur/ Kalyani/ Krishnanagar/
Tehatta/Ranaghat/Nakashipara/Berhampore/ Raghunathgunj/ Kandi/ Domkal/ Jiaganj/ North Malda/
South Malda/ Raiganj/ Balurghat/Buinadpur/ Coochbehar/ Mathabhanga/ Alipurduar/ Jalpaiguri/ Mal/
SiliguriSubarban/ Siliguri Town/ Darjeeling/ Kurseong/ Kalimpong/ Islampur Division : WBSEDCL.
09. The P.S. to Chairman & Managing Director : WBSEDCL : VidyutBhavan : Kolkata- 91.

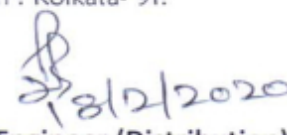
Chief Engineer (Distribution)
WBSEDCL

SCHEDULE OF WORKS AND CORRESPONDING UNIT RATE FOR 11 KV. & 1.1 KV. UNDERGROUND ELECTRICAL SYSTEM WITHIN THE JURISDICTION OF WBSEDCL WITHIN WEST BENGAL EXCEPT HILLY AREA

Sl. no.	Description of Work	Unit	Rate (Rs.)	Remarks
1	Survey of H.T & L.T cable route as per instruction of Site Engineer and submission of route survey drawing (in two copies) inscribing different land marks	Mtr	2.7	
2	Excavation of soil for making of trial hole (Minm. Size 1.1 X 0.5 X 1.2M depth) as per instruction of the Site Engineer including backfilling the excavated soil.	Cum.	34.0	
3	Excavation of soil for formation of cable trenches & re-instatement of cable trenches with the excavated soil as per direction of Site Engineer.	Cum.	20.0	
4	Excavation of soil by cutting of Metalled Road/Cement Concrete/Brick Soling etc & re- instatement of the same as per instruction of Site Engineer	Cum.	152.0	
5	Excavation of soil along the existing cable route for formation of cable trenches along with the up-rooting of protective covers in the existing trench& re-instatement of same cable trenches with the excavated soil after erection of protective covers.	Cum.	27.0	
6	Excavation of soil by cutting of Metalled Road/Cement Concrete/Brick masonry / chequered plate/ Paver block etc for formation of cable trench along with up-rooting of protective cover in the existing trench & reinstatement of the same cable trench after erection of protective cover.	Cum.	136.0	
7	Supply & laying of following R.C.C Spun Pipe (NP-3)			
i)	150mm dia. Spun Pipe	Mtr	557.00	
ii)	225mm dia. Spun Pipe.	Mtr	600.00	
8	Supply of kiln-burnt 1st class bricks having proper size & shape suitable for cable protective cover as per instruction of Site Engineer	No	See Annexure - "P"	
9	Laying of bricks as per drawing and instruction of the Site Engineer	No.	1.12	
10	Laying & dressing of following 11 KV /1.1 KV PILC / XLPE/PVC cable in the excavated cable trenches as per drawing no.PLN(D)/SS/104, dt. 05.05.2015 and instruction of the Site Engineer.			
a.	Cable 11 KV PILC / XLPE 3 x 35/50/70 sq. mm.	Mtr	35	
b.	Cable 11 Ky PILC / XLPE 3 x 95/120 sq. mm.	Mtr	42	
c.	Cable 11 KV PILC / XLPE 3 x 185/240 sq. mm.	Mtr	52	
d.	Cable 11 KV PILC / XLPE 3 x 300/400 sq. mm	Mtr	62	
e.	Cable 1.1 KV PVC/ XLPE 2X10, 4X10/16, 3.5/4X25 sq. mm	Mtr	15	
f.	Cable 1.1 KV PVC / XLPE 3.5/4 x 35/50/70 sq.mm	Mtr	24	
g.	Cable 1.1 KV PVC / XLPE 3.5/4 x 95/120 sq.mm	Mtr	31	
h.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 185 / 225/240 sq.mm	Mtr	39	
i.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 300 / 400 sq.mm	Mtr	50	
11	Making of Straight Through/Transition Joint including making of jointing pit of the following 11/1. 1 KV.PILC/ XLPE/ PVC cable without supply of jointing materials excluding making of "protection duct for cable joint"			
a.	Cable 11 KVPILC/XLPE 3x95/120sq. mm.	No.	1604	
b.	Cable 11 KV PILC / XLPE 3 x 185/240 sq. mm	No.	2037	
c.	Cable 11 KV PILC / XLPE 3 x 300/400 sq. mm	No.	2150	
d.	Cable 1.1 KV PVC/ XLPE 2X10, 4X10/16, 3.5/4X25 sq. mm	No.	569	
e.	Cable 1.1 KV PVC / XLPE 3.5/4 x 35/50/70 sq.mm	No.	576	
f.	Cable 1.1 KV PVC / XLPE 3.5/4 x 95/120 sq.mm	No.	787	
g.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 185 / 225/240 sq.mm	No.	894	
h.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 300 / 400 sq.mm	No.	1027	

Sl. no.	Description of Work	Unit	Rate (Rs.)	Remarks
12	Making of 'T Joint / ' T cum Straight Through' joint including making of jointing pit of the following 1.1 KV PVC/XLPE cable with jointing kit but without supply of jointing materials and excluding making of "protection duct for cable joint" .			
a.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 50 & 3.5/4 x 16 sq. mm	No.	689	
b.	Cable 1.1 KV PVC/ XLPE 3.5 /4 x 95 & 3.5/4 x 16 sq. mm	No.	1014	
c.	Cable 1.1 KV PVC/ XLPE 3.5/4 x120 & 3.5/4 x 16 sq. mm	No.	1119	
d.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 185 & 3.5/4 x 16 sq. mm	No.	1328	
e.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 185 & 3.5/4 x 50 sq. mm	No.	1373	
13	Making & fixing of end termination joint indoor or outdoor type for 11 KV PILC /XLPE cable including fixing of the jointing box at the existing structure but without the jointing materials as per instruction of the Site Engineer.			
a.	Cable 11 KV PILC / XLPE 3 x 95/120 sq. mm.	No.	1369	
b.	Cable 11 KV PILC /XLPE 3 x 185/240 sq. mm	No.	1685	
c.	Cable 11 KV PILC / XLPE 3 x 300/400 sq. mm	No.	2023	
14	Making of end termination of the following 1.1 KV PVC/ XLPE Cable excluding supply of suitable cable glands, tapes, lugs, sockets & other necessary materials as per instruction of the Site Engineer.			
a.	Cable 1.1 KV PVC/XLPE 2 x 10/ 4X10/ 4 x 16/ 3.5 x 25 sq. mm	No.	186	
b.	Cable 1.1 KV PVC/XLPE 3.5/4 x 50 / 70 sq.mm.	No.	337	
c.	Cable 1.1 KV PVC /XLPE 3.5/4 x 95 /120 sq.mm.	No.	547	
d.	Cable 1.1 KVPVC/XLPE 3.5/4 x 185/225 sq.mm.	No.	923	
e.	Cable 1.1 KVPVC/XLPE 3.5/4 x300/400sq.mm..	No.	1144	
15	Making protective duct for cable joint complete as per WBSEDCLs approved drawing (Ref. Drg. no.PLN(D)/SS/106, dt. 05.05.2015)	No.	8991.00	
16	Supply & Erection of Cast Iron Cable Marker on concrete foundation blocks for straight run, road crossing, joint location etc as per drawing no..PLN(D)/SS/107 or 108, dt. 05.05.2015 & specification & direction of Site Engineer.	No.	300.00	
17	Supply & fixing/ laying of G.I Pipe (Medium) (Non-TATA) as per I.S.I of the following sizes suitable for cable protection as per instruction of Site Engineer.			
a	G.I Pipe 50mm dia. (Medium)	Mtr	461	
b	G.I Pipe 100mm dia.(Medium)	Mtr	777.00	
c	G.I Pipe 150 mm dia.(Medium)	Mtr	1152.00	
18	Making of R.C.C/ Cement Concrete/ Masonry Plinth/ Foundation suitable for the following items including supply of materials as per approved drawing .			
a.	Distribution Transformer 630 KVA (Ref. Drg. no. PLN(D)/SS/101, dt. 05.05.2015)	No.	14758	
b.	Distribution Transformer 315/250 KVA (Ref. Drg. no. PLN(D)/SS/101, dt. 05.05.2015)	No.	12049	
c.	L&MV Kiosk (Ref. Drg. no. PLN(D)/SS/102, dt. 05.05.2015)	No.	10235	
d.	Distribution Feeder Pillar Box . (Ref. Drg. no.PLN(D)/SS/102, dt. 05.05.2015)	No.	9237	
e.	Block Junction Box / Plot Junction Box. (Ref. Drg. no.PLN(D)/SS/102, dt. 05.05.2015)	No.	4751	
f.	Service Junction Box (Ref. Drg. no.PLN(D)/SS/102, dt. 05.05.2015)	No.	3676	
g.	Street Light Feeder Pillar Box. (Ref. Drg. no. PLN(D)/SS/102, dt. 05.05.2015)	No.	3197	
h.	Out Door 11 KV 250/ 350 MVA 400 / 630A, 3 /4 Way RMU (Ref. Drg. no. PLN(D)/SS/132 & 133, dt. 17.06.2019)	No.	24065	
i.	Out Door 11 KV 250/ 350 MVA 400 / 630A, 3 /4 Way RMU with FRTU (Ref. Drg. no. PLN(D)/SS/137 , dt. 04.07.2019)	No.	28887	

22

Sl. no.	Description of Work	Unit	Rate (Rs.)	Remarks
19	Erection of the following items on the existing plinth / structure including proper fixing on the plinth / Structure as per instruction of the Site Engineer.			
a.	Distribution Transformer 630 KVA	No.	14433	
b	Distribution Transformer 315/250 KVA	No.	7248	
c.	L& MV Kiosk	No.	1441	
d.	Distribution Feeder Pillar Box .	No.	1499	
e.	Block Junction Box/Service Junction Box.	No.	696	
f	Street Light Feeder Pillar Box.	No.	897	
g.	L& MV metering Kiosk (L.T Bulk Consumer)	No.	2155	
20	Earthing of Transformer / Indoor or out door 3 or 4 way RMU /Single or Multi 11 KV OCB / VCB as per drawing consisting of 1 nos, 3 metres long 50 mm dia. medium gauge G.I TATA make Pipe (M), installation & connection in between earth pipe and other equipments using 2 nos. G.I Flat 40mm x 6 mm. by welding complete and as per instruction of the Site Engineer (including supply of all materials)	Job	5038	
21	Erection of Indoor 11 KV 250 /350 MVA 400 /630 A 3 way Ring Main Unit, metering / non-metering OCB/VCB complete as per WBSEDCL's approved drawing and as per instruction of Site Engineer.	Set	10626	
22	Erection of Out Door 11 KV 250/ 350 MVA 400 / 630A 3 way RMU metering /non-metering OCB / VCB complete on existing plinth as per WBSEDCL's approved drawing and as per instruction of Site Engineer.	Set	9787	
23	Erection of Indoor 11 KV 250 /350 MVA 400 /630 A 4 way Ring Main Unit, metering / non-metering OCB/VCB complete as per WBSEDCL's approved drawing and as per instruction of Site Engineer.	Set	12372	
24	Erection of Out Door 11 KV 250/ 350 MVA 400 / 630A 4 way RMU metering /non-metering OCB / VCB complete on existing plinth as per WBSEDCL's approved drawing and as per instruction of Site Engineer.	Set	11532	
25	Erection of Shunt / Series Trip Indoor type 11 kv. 250/350MVA, 400/ 800/1250 Amp. metering /non-metering OCB / VCB complete as per WBSEDCL's approved drawing and as per instruction of Site Engineer.	No.	6628	
26	Drying out of 11 KV 3/4 Way Ring Main Unit / Single panel metering / non metering OCB / VCB including CT, PT etc for improving of insulation value up to the suitable limit and as per instruction of the Site Engineer.	Set	928	
27	Special arrangement for covering of the 11 KV end jointing portion at the 11 KV Isolator or OCB / VCB end by using M.S. Sheet 10 Gauge M.S Angle etc. as per instruction of the Site Engineer including supply of all materials & with paints.	No.	1698	
28	Extension of cable end jointing box of the Transformer, H.V side with M.S. Sheet, Angles etc. suitable for fixing & covering of the 11 KV end joint as per instruction of Site Engineer.	No.	1698	
29	De-compounding. of existing 11 KV cable end joint box & cleaning of the box suitable for further use of the said box as per instruction of the Site Engineer.	No.	1054	
30	Making of jointing pit only by the excavation of soil suitable for making of straight through joint of following cables including laying of platform with bricks for placement of joint box & pitching up of temporary tent by providing bamboo & tarpolene & re-instatement, of the joint pit with the excavated soil after completion of jointing work			
a.	11KV	No.	998	
b.	1.1 KV	No.	368	

Sl. no.	Description of Work	Unit	Rate (Rs.)	Remarks
31	Lifting & checking of the following 11 KV / 1.1 KV PILC / XLPE / PVC cable to ascertain the actual fault including guarding arrangement up to the time of testing & jointing works			
a.	Cable 11 KV PILC / XLPE 3 x 35/50/70 sq. mm	Mtr.	25	
b.	Cable 11 KV PILC / XLPE 3 x 95/120 sq. mm.	Mtr	29	
c.	Cable 11 KV PILC / XLPE 3 x 185/240 sq. mm.	Mtr	38	
d.	Cable 11 KV PILC / XLPE 3 x 300/400 sq. mm.	Mtr	46	
e.	Cable 1.1 KV PVC/ XLPE 2 x 10, 3.5/ 4X10, 3.5 /4 x 16, 3.5/4 x 25 sq mm.	Mtr	17	
f.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 35/50 / 70 sq. mm.	Mtr	29	
g.	Cable 1.1 KV PVC / XLPE 3.5/4x 95 / 120 sq. mm.	Mtr	34	
h.	Cable 1.1 KV PVC / XLPE 3.5/4 x 185 / 225 /240 sq. mm.	Mtr	36	
i.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 300 / 400 sq. mm.	Mtr	50	
32	Relaying & dressing of existing healthy portion of the following 11 KV/ 1.1 KV PILC / XLPE / PVC cable in the already excavated trench as per instruction of the Site Engineer.			
a.	Cable 11 KV PILC / XLPE 3 x 95/120 sq. mm.	Mtr	31	
b.	Cable 11 KV PILC / XLPE 3 x 185/240 sq. mm.	Mtr	35	
c.	Cable 11 KV PILC / XLPE 3 x 300/400 sq. mm.	Mtr	43	
d.	Cable 1.1 KV PVC/ XLPE 2 x 10, 3.5/ 4X10, 3.5 /4 x 16, 3.5/4 x 25 sq mm.	Mtr	15	
e.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 35/50 / 70 sq. mm.	Mtr	21	
f.	Cable 1.1 KV PVC / XLPE 3.5/4x 95 / 120 sq. mm.	Mtr	27	
g.	Cable 1.1 KV PVC / XLPE 3.5/4 x 185 / 225 /240 sq. mm.	Mtr	31	
h.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 300 / 400 sq. mm.	Mtr	42	
33	Dismantling of the following worn-out / damage/ good items from the existing plinth including return to store.			
a.	L & MV Kiosk / Feeder Pillar Box.	No.	797	
b.	S.J.B/J.B / Street light feeder Pillar Box	No.	587	
34	Demolishing of the existing plinth including removal of debris from work site.			
a.	L&MV Kiosk/ Feeder Pillar Box (As per drg. no. PLN(D) /SS/102, dt. 05.05.2015)	No.	860.00	
b.	S.J.B/J.B / Street light feeder Pillar Box (As per drg. no. PLN(D)/SS/102, dt. 05.05.2015)	No.	410.00	
35	Fitting & fixing of following items with / without fabrication complete in all respect in L&MV panel /FP box/JB/SJB/ Street light feeder pillar box, Consumer's premises as per instruction of Site Engineer.			
a.	MCCBs of rating 400 A and above	No.	928	
b.	Main Switches of rating 200 A and above	No.	1138	
c.	Cut-out of rating 200A and above complete set.	No.	442	
d.	Cut-out of rating 100 A and below complete set.	No.	232	
36	Dismantling of the following items from L & MV panel / feeder pillar box / Junction Box / Service Junction Box / Consumer's premises as per instruction of Site Engineer.			
a.	MCCBs of rating 400 A and above	No.	337	
b.	Main Switches of rating 200 A and above	No.	295	
c.	Cut-out of rating 200A and above complete set.	No.	189	
d.	Cut-out of rating 100 A and below complete set.	No.	74	

28

Sl. no.	Description of Work	Unit	Rate (Rs.)	Remarks
37	Supply & installation of earth Bus-bar made of galvanized iron of size 600 mm x 25 mm x 4mm with 5 nos of holes with necessary bending and fixing on the wall.	No.	360	
38	Supply & fixirfg of cable tag on the cable.	No.	48	
39	Dismantling of 11 KV 250 /350 .MVA, 400 / 630 A 3- Way Indoor/ Out Door Ring Main Unit with 2 Incoming with metering/ Non- Metering OCB / VCB with accessories and return the same to WBSEDCL's Store including transportation charges	Set	4794	
40	Dismantling of 11 KV Single panel 250 /350 MVA, 400 / 800/ 1250 A Shunt / Series Trip Indoor type metering OCB / VCB with accessories and return the same to WBSEDCL's Store including transportation charges.	Set	3447	
41	Removal/ Uprooting & Returning of 11 KV XLPE / PILC cable from site to WBSEDCL's Store including transportation charges.			
a.	3x 35 sqmm. & up to 120 sq.mm. cable	Mtr	31	
b.	3x 150 sqmm. & up to 240 sq.mm cable	Mtr	35	
c.	3x 300sqmm. & up to 400sq.mm cable	Mtr	43	
42	Removal/ Uprooting of 11 KV XLPE / PILC cable from the existing cable trenches including protective covers(bricks) by excavation of soil and shifting & relaying the same cable in the new cable trenches by excavation of soil and installation of cable protective covers (existing bricks) and re-instatement of the same cable trenches with the excavated soil as per instruction of the Site Engineer			
a.	3x 35 sqmm. & up to 120 sq.mm. cable	Mtr	77	
b.	3x 150 sqmm. & up to 240 sq.mm cable	Mtr	89	
c.	3x 300sqmm. & up to 400sq.mm cable	Mtr	117	
43	Removal/Uprooting & Returning of 1.1 KV XLPE/ PVC cable from site to WBSEDCLs Store including transportation charges as per instruction of the Site Engineer.			
a	2X10, 4X10, 4X16, 3.5/4 X 25sq.mm	Mtr	8	
b	3.5/4 X 35/50/70 sq. mm	Mtr	10	
c	3.5/4 X 95/120 sq. mm	Mtr	13	
d.	3.5/4 X 185 / 225 / 240 sq.mm	Mtr	15	
e	3.5 /4 X 300 / 400 sq. mm	Mtr	17	
44	Removal/Uprooting of existing 1.1KV XLPE / PVC cable from the existing cable trenches and shifting and relaying the same cable in the new cable trenches as per instruction of the Site Engineer.			
a.	2X10, 4X10, 4X16, 3.5/4X25sq.mm	Mtr	8.7	
b.	3.5/4 x 35 / 50 / 70 / 90 / 120 sq.mm	Mtr	73	
c.	3.5/4 x 150/185/240sq.mm	Mtr	94	
d.	3.5/ 4x 300 /400 sq.mm	Mtr	110	
45	Making of end termination in one lead/one phase of the following 1.1 KV PVC/ XLPE Cable including supply of suitable cable glands as per instruction of the Site Engineer.			
a.	Cable 1.1 KV PVC/ XLPE 3.5/4 x 50/70 sq.mm	No.	74	
b	Cable 1.1 KV PVC/ XLPE 3.5/4 x 95 / 120 sq.mm.	No.	146	
c	Cable 1.1 KV PVC/ XLPE 3.5/4 x 185 / 225 sq.mm. .	No.	229	
d	Cable 1.1 KV PVC/ XLPE 3.5 /4 x 300 / 400 sq.nim.	No.	271	
46	De-compounding of existing 1.1 KV grade cable end joint box & cleaning of the box suitable for further use of the said box as per instruction of the Site Engineer.	No.	420	

88

Sl. no.	Description of Work	Unit	Rate (Rs.)	Remarks
47	Micro-Tunnelling work with laying of HDPE pipe as per instruction of Site Engineer and as per site condition with laying of U.G cable including supply of HDPE pipe as per IS: 4984-1995 including preparation and submission of drawing for such cable laying			Detail scope of Micro-Tunnelling work is as per Annexure- "S"
a.	With 160mm diam. HDPE Pipe, PE-80 , PN-6 (this rate is applicable for state highway/NH/Road with propensity of high density of heavy vehicle)	Mtr	1588.00	
b.	With 110mm diam. HDPE Pipe, PE-80 , PN-6 (this rate is applicable for state highway/NH/Road with propensity of high density of heavy vehicle)	Mtr	1116.00	
48	Micro-Tunnelling work with laying of HDPE pipe as per instruction of Site Engineer and as per site condition with laying of U.G cable including supply of HDPE pipe as per IS: 4984-1995 including preparation and submission of drawing for such cable laying			Detail scope of Micro-Tunnelling work is as per Annexure- "S"
a.	With 160mm diam. HDPE Pipe, PE-80 , PN-4 (this rate is applicable for Normal road / Normal corridor)	Mtr	1323.00	
b.	With 110mm diam. HDPE Pipe, PE-80 , PN-4 (this rate is applicable for Normal road / Normal corridor)	Mtr	987.00	
49	Laying of HDPE pipe as per Jack push method as per instruction of Site Engineer and as per site condition for laying of U.G cable including supply of HDPE pipe as per IS: 4984-1995			Detail scope of Micro-Tunnelling work is as per Annexure- "S"
a.	With 160mm diam. HDPE Pipe, PE-80 , PN-6	Mtr	1320.00	
b.	With 110mm diam. HDPE Pipe, PE-80 , PN-6	Mtr	1045.00	
50	Laying of 11 KV. XLPE/ PILC U.G cable as per specification and as per approved drawing no. PLN(D)/SS/105, dt. 05.05.2015 and instruction of Site Engineer			
a.	Double cable in a trench			
	i. Cable size 185 sqmm. & below	Mtr	70	
	ii. Cable size 240 sqmm. & above	Mtr	90	
b.	More than 2 cables in a trench			
	i. Cable size 185 sqmm. & below	Mtr	107	
	ii. Cable size 240 sqmm. & above	Mtr	129	
51	Laying of 1.1 KV. XLPE/ PVC U.G cable as per specification and as per approved drawing no. PLN(D)/SS/105, dt. 05.05.2015 and instruction of Site Engineer			
a.	Double cable in a trench			
	i. Cable size 185 sqmm. & below	Mtr	57	
	ii. Cable size 240 sqmm. & above	Mtr	72	
b.	More than 2 cables in a trench			
	i. Cable size 185 sqmm. & below	Mtr	82	
	ii. Cable size 240 sqmm. & above	Mtr	102	


 Chief Engineer (Distribution)
 WBSEDCL

Annexure - "P"

Rates of supply of 1st Class Bricks (Kiln Burnt) in different Districts of West Bengal as per PWDSOR'2017 (Ref :- item no. 8 of "RATE CONTRACT" of U.G Cable)			
Sl. no.	Name of the District	Unit	Rate (Rs.)
1	Kolkata/ 24- Parganas (S)/ 24- Parganas (N)/ Howrah/ Hooghly/Area of Kalyani Sub Div	1000 nos.	8095.00
2	Burdwan(Purba & Paschim)	1000 nos.	7381.00
3	Purulia/ Birbhum	1000 nos.	6190.00
4	Midnapur(E)/ Midnapur(W)/Jhargram	1000 nos.	8095.00
5	Bankura	1000 nos.	6762.00
6	Nadia (excluding the Area of Kalyani Sub Div)/ Murshidabad	1000 nos.	7381.00
7	Malda	1000 nos.	7381.00
8	Jalpaiguri/ Alipurduar/ Plains of Siliguri Sub Div / Haldibari P.S	1000 nos.	7381.00
9	Coochbehar excluding the area of Haldibari PS	1000 nos.	7381.00
10	Uttar Dinajpur/ Dakshin Dinajpur	1000 nos.	7381.00
11	Darjeeling,Kalingpong except plains of siliguri sub Divn	1000 nos.	10000.00





Detail Scope of work for Micro- Tunnelling with HDPE pipe for Underground cable laying

1	The Micro-Tunnelling work with HDPE Pipe of requisite sizes (160 mm. or 200mm.dia. as per IS: 4984-1995) by Horizontal Direct drilling(H.D.D) method may be done for laying of different sizes of underground cables along the route for main crossing point of NH/ SH/ Metal road, Railway, River/ Canal, Other pipelines/ installations of different utilities as per direction of Engineer-In Charge. (Cost of all materials, labour, hiring charges of tools, plants, machineries etc., transportations, incidentals are to be borne by the contractor)
2	Ground penetrating Radar survey along the proposed Micro-Tunnelling route for identification of underground services is to be adopted during Micro-tunnelling work
3	Requisite safe drilling inspection pits and test pits, where ever necessary, are to be executed during Micro-tunnelling work
4	Guided boring/ drilling Technology is to be used.
5	In horizontal and vertical boring system should be capable up to 10 m below ground level
6	Depth of boring should be as to clear any underground utilities/ obstructions. Minimum depth of boring for road crossing should be 1.65m from the crust level of road. The micro -Tunneling should be at least 2 m below the design bed level of the Channel/ Canal
7	Radio or any other detection system should be used for avoiding damage to existing underground utilities like electric cables, water pipe lines, sewerage line, Telcom copper cables, Optical fibres, Gas pipe lines etc.
8	The record of depth of laying HDPE pipe through Micro-Tunnelling below the canal / road/ Railway/ other utilities should be maintained at an interval of 5m.
9	Necessary data from the appropriate different authorities for crossing point are to be obtained for Micro-Tunnelling work with the assistance of WBSEDCL
10	Proposed Micro-Tunnelling diagram with land mark along with depth profile are to be submitted for obtaining approval from the respective utilities before execution. After execution of Micro-Tunnelling work route profile are to be submitted for record.









<u>REVISIONS</u>	 WBSEDCL	DISTRIBUTION HQ.	
		PLANNING AND ENGINEERING DEPARTMENT	
DETAILS OF 615 / 315 / 250 KVA TRANSFORMER FOUNDATION PLAN & SECTIONAL ELEVATION		DRAWN BY: Bm 04.05.2015 S.A.E(C)	
		DESIGNED BY: A. 05.05.15. D.E(C)	
		CHECKED BY: V. M. 06.05.15 S.E(C)	DRAWING NO. PLN(D)/SS/101
		RECOMMENDED BY: Chakraborty 05.05.15 AGG. C.E.-III	SCALE: AS STATED
		APPROVED BY: 5.5.15 P.E. (Dist. P & E)	DATE: 05.05.2015
			SHEET NO. 1 OF 1
			REV. NO. 0

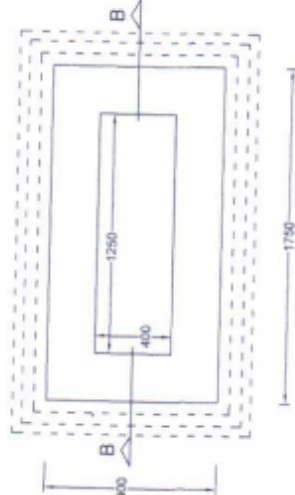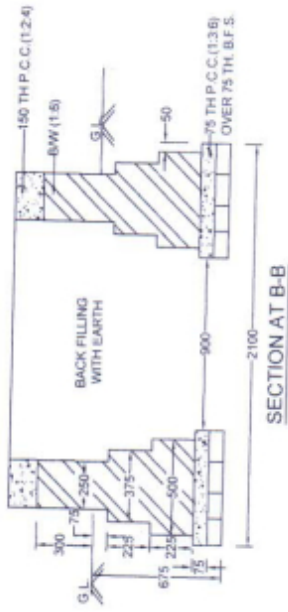

PLAN OF L&MV KIOSK FOUNDATION

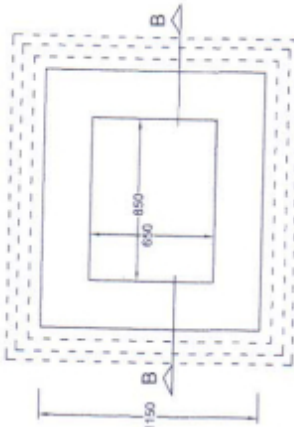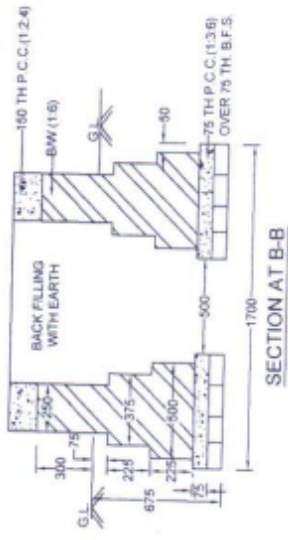

PLAN OF FEEDER PILLAR BOX FOUNDATION

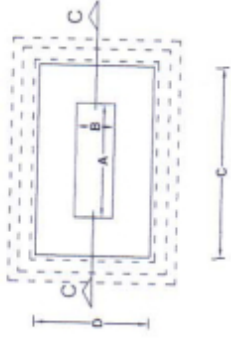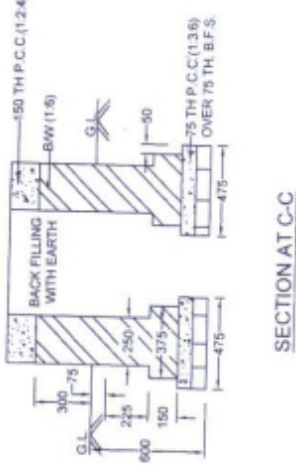


PLAN OF BLOCK/ PLOT J.B. FOUNDATION

For	A	B	C	D
Plot Block J.B.	600	200	1000	600
Service J.B.	400	100	800	500
Street light PP Box	200	50	600	450

- NOTES:
1. ALL DIMENSIONS ARE IN MM
 2. EXPOSED SURFACE SHALL BE CEMENT PLASTERED (1:4) WITH NEAT CEMENTING.
 3. ONLY FIGURE DIMENSION SHOULD BE FOLLOW

SCALE OF ARCHITECTURE CONSULTANT & S.L. 0022

REVISIONS	WBSEDCCL		DISTRIBUTION HQ.	
	PLANNING AND ENGINEERING DEPARTMENT			
FOUNDATION DETAILS OF L&MV KIOSK, FEEDER PILLAR BOX, PLOT J.B. AND SERVICE J.B. PLAN & SECTIONAL ELEVATION				
DRAWN BY	Bm	04.05.2015	SCALE	AS STATED
DESIGNED BY	S.A.E.I.C.I.	05.05.15	DRAWING NO.	PLN/DES/102
CHECKED BY	S.E.I.C.I.	05.05.15	SHEET NO.	1 OF 1
RECOMMENDED BY	S.E.I.C.I.	05.05.15	DATE	05.05.2015
APPROVED BY	S.E.I.C.I.	05.05.15	REV NO.	0

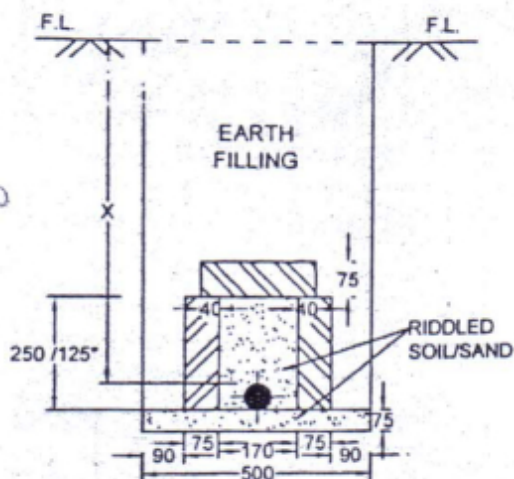

FOR CABLE UPTO 1.1 KV OF SIZE	
4 CORE	120, 35, 50, 25 1650 SQ. MM
250 FOR CABLE UPTO 1.1 KV OF SIZE	
4 CORE	400, 300, 240, 185 / SQ. MM
250 FOR CABLE UPTO 11 KV OF SIZE	
3 CORE	400, 300, 240, 185 SQ. MM

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. ONLY FIGURE DIMENSION SHOULD BE FOLLOWED
3. FOR IDENTIFICATION OF POWER CABLE, THE CABLE PROTECTIVE COVER SUCH AS BRICKS WITH TAPE MARKED WITH WORDS "WBSEDCL" OR TILES SUITABLY EMBOSSED WITH WORDS "WBSEDCL" SHOULD BE USED.


SCHEDULE OF DEPTH 'X'	
CABLE UPTO 1.1 KV	'X' = 750
H.T. CABLE UPTO 11KV	'X' = 900

IN CASE OF ANY CONFUSION PLEASE CONSULT DIST. P. & E. DEPT.

REVISIONS		DISTRIBUTION HQ.	
		PLANNING AND ENGINEERING DEPARTMENT	
ARRANGEMENT FOR U.G. CABLE LAYING DIRECT IN GROUND WITH BRICK PROTECTION IN ORDINARY LOCATION			
DRAWN BY:	Bm 04.05.2015 S.A.E.(C)		
DESIGNED BY:	A. S. S. 05.05.15 D.E.(C)		
CHECKED BY:	J. M. W. 05.05.15 S.E.(C)	DRAWING NO. PLN/ISS/104	
RECOMMENDED BY:	G. K. S. 05.05.15 A.E.(C)	SCALE AS STATED	SHEET NO 1 OF 1
APPROVED BY	S. S. S. 05.05.15 C.E. (Dist. P & E)	DATE 06.05.2015	REV NO 0



*125 FOR CABLE UP TO 1.1 KV OF SIZE	
4 CORE	150,120,95,50, 25,16 SQ MM
*250 FOR CABLE UP TO 1.1 KV OF SIZE	
4 CORE	400,300,240,185 SQ MM
*150 FOR CABLE UP TO 11 KV OF SIZE	
3 CORE	400,300,240,185 SQ MM





SCHEDULE OF DEPTH 'X'	
CABLE UP TO 1.1 KV	'X' = 750
H.T. CABLE UP TO 11KV	'X' = 900

NOTES:


- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. ONLY FIGURE DIMENSION SHOULD BE FOLLOWED
 3. FOR IDENTIFICATION OF POWER CABLE, THE CABLE PROTECTIVE COVER SUCH AS BRICKS WITH TAPE MARKED WITH WORDS "WBSDECL" OR TILES SUITABLY EMBOSSED WITH WORDS "WBSDECL" SHOULD BE USED.

IN CASE OF ANY CONFUSION PLEASE CONSULT DIST. P. & E. DEPT.

REVISIONS	 WBSEDCL	DISTRIBUTION HQ.	
		PLANNING AND ENGINEERING DEPARTMENT	
ARRANGEMENT FOR LAYING OF 4 NOS & 3 NOS U.G. CABLE DIRECTLY IN GROUND WITH BRICKS PROTECTION IN ORDINARY LOCATION			
DRAWN BY :	Bin 04.05.2015 SAE (C)		DRAWING NO. PLN(D)/SS/105
DESIGNED BY :	05.05.15 DE (C)		
CHECKED BY :	SAE (C)		
RECOMMENDED BY :	05.05.15 A.S.C.F. (C)	SCALE AS STATED	SHEET NO. 1 OF 1
APPROVED BY :	05.05.15 SAE (C) (DR P.A.F.)	DATE 05.05.2015	REV. NO. 0

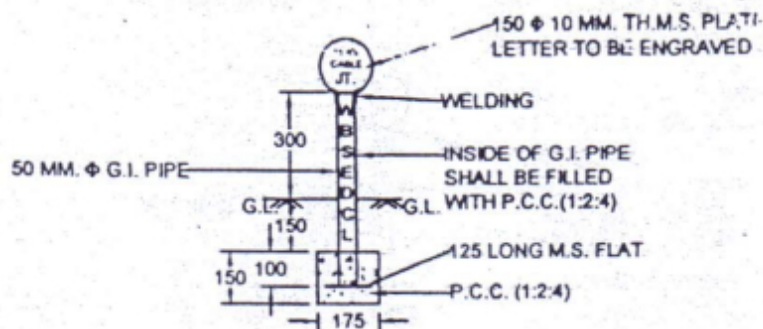

ELEVATION





PLAN

NOTES:


1. ALL DIMENSIONS ARE IN MM.
2. ONLY FIGURE DIMENSION SHOULD BE FOLLOWED
3. THIS DRAWING SUPERSEDES DRAWING NO. -
PLN(D)/CABLE/ 04 AND PLN(D)/CABLE/ 05

IN CASE OF ANY CONFUSION PLEASE CONSULT DIST. P. & E. DEPT.

<u>REVISIONS</u>	 WBSEDCL	DISTRIBUTION HQ.	
		PLANNING AND ENGINEERING DEPARTMENT	
DETAILS OF MARKER FOR 11KV CABLE JOINT			
DRAWN BY:	Bm 04.05.2015 SAE(C)		DRAWING NO. PLN(D)/SS/107
DESIGNED BY:	R. 05.05.15 DE(C)		
CHECKED BY:	J. Na/05.05.15 SE(C)	SCALE:	SHEET NO.
RECOMMENDED BY:	05.05.15 ASST. CE-III	AS STATED	1 OF 1
APPROVED BY:	05.05.15 V.C.E. (Dist. P. & E.)	DATE:	REV. NO.
		05.05.2015	0

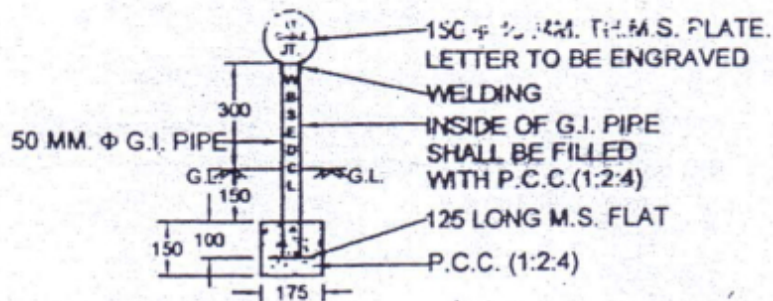

ELEVATION



PLAN


NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. ONLY FIGURE DIMENSION SHOULD BE FOLLOWED
3. THIS DRAWING SUPERSEDES DRAWING NO. - PLN(D)/CABLE/ 04 AND PLN(D)/CABLE/ 05


IN CASE OF ANY CONFUSION PLEASE CONSULT DIST. P. & E. DEPT.

<u>REVISIONS</u>	 WBSEDCL		DISTRIBUTION HQ.	
			PLANNING AND ENGINEERING DEPARTMENT	
DETAILS OF MARKER FOR LT CABLE JOINT				
DRAWN BY:	Bm 04.05.2015 S.A.E.(C)		DRAWING NO. PLN(D)/SS/108	
DESIGNED BY:	05.05.15. D.E.(C)			
CHECKED BY:	05.05.15. S.E.(C)	SCALE: AS STATED		
RECOMMENDED BY:	05.05.15. Addl. C.E.-III			
APPROVED BY:	05.05.15. C.E. (Dist. P. & E.)	DATE: 05.05.2015		SHEET NO. 1 OF 1 REV. NO. 0

BAR POSITION AND DIA TO BE FINISHED AS PER EQUIPMENT

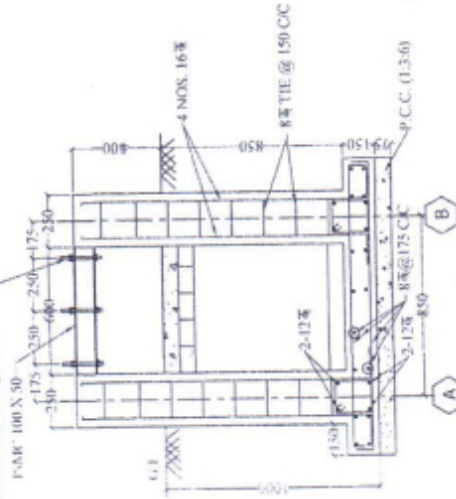


SECTION B-B
SCALE: 1:25

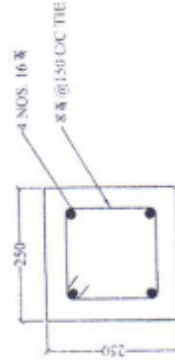


TYPICAL SECTION OF COLUMN
SCALE: 1:10

X - HOLE CENTRE

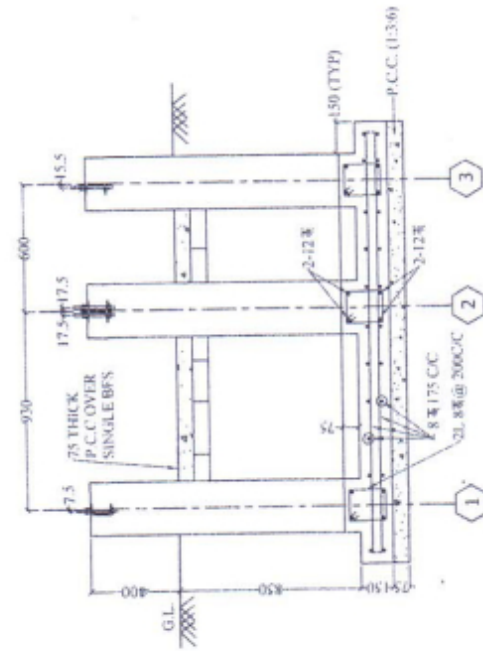

SECTION A-A
SCALE: 1:25

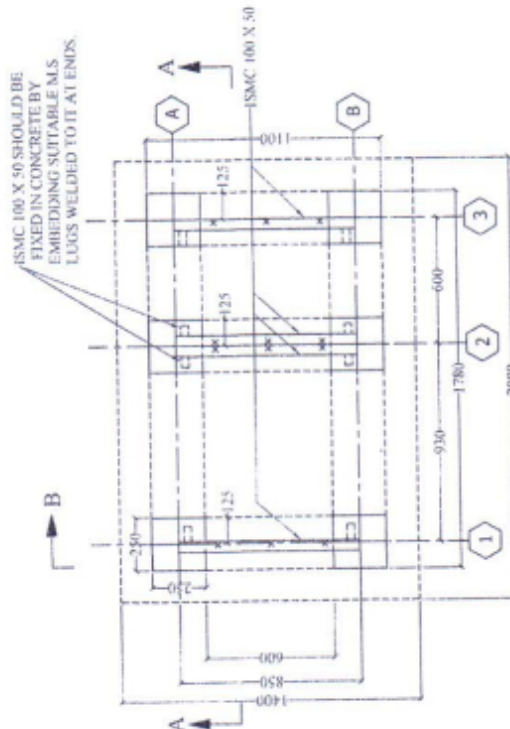

FOUNDATION PLAN
SCALE: 1:25

NOTE

- ALL DIMENSIONS ARE IN MILLIMETER, UNLESS OTHERWISE STATED.
- FIGURED DIMENSIONS SHOULD BE FOLLOWED.
- REINFORCED CONCRETE SHOULD BE OF GRADE M20 (NOMINAL MIX 1:1.5:3) AND REINFORCING STEEL SHOULD CONFORM FE-500 AS PER IS: 1786.
- FOUNDATION BED SHOULD BE WELL COMPACTED BEFORE LAYING OF CONCRETE.
- EXPOSED SURFACE OF THE FOUNDATION UP TO 400 MM BELOW FINISHED GROUND LEVEL (G.L.) SHOULD BE PROVIDED WITH 10 MM THICK PLASTER (1:4) AND NEAT CEMENT PUTTING.
- FOUNDATION BOTTOM AND SIDE WALL SHOULD HAVE CLEAR COVER OF 50 MM AND PEDESTAL SHOULD HAVE CLEAR COVER OF 40 MM.
- HOLE DIA - 12MM, FOUNDATION BOLT - M10
- THE HOLE CENTRE DISTANCES SHOWN ARE AS PER G.A. DRAWING, HOWEVER, BEFORE MAKING HOLES IN CHANNELS THESE DIMENSIONS SHOULD BE CHECKED AND VERIFIED WITH THE ACTUAL.
- THIS DRAWING IS PREPARED BASED ON 3 WAY RMU G.A. DRAWING & FOUNDATION DRAWING OF MS SIEMENS (DRG. NOS. 502_9683_9 AND 502_8458_9).


REF: 1. UO NOTE NO. CE/Dist. Project-IJNS-680 DATED 08.06.2019

IN CASE OF ANY CONFUSION PLEASE CONSULT DIST. P. & E. DEPT.


REVISIONS	WBS/EDCL	DISTRIBUTION HQ.
		PLANNING AND ENGINEERING
		FOUNDATION DETAIL OF SCADA COMPATIBLE SIEMENS MAKE RMU - 3 WAY
DRAWN BY:	SR. S. E. E. 19	DRAWING NO. PLN(D)/SS/132
DESIGNED BY:	SR. S. E. E. 19	SCALE: AS STATED
CHECKED BY:	SR. S. E. E. 19	DATE: 17.06.2019
RECOMMENDED BY:	SR. S. E. E. 19	REV. NO. 0
APPROVED BY:	SR. S. E. E. 19	

NOTE

1. ALL DIMENSIONS ARE IN MILLIMETER, UNLESS OTHERWISE STATED.
2. FIGURED DIMENSIONS SHOULD BE FOLLOWED.
3. REINFORCED CONCRETE SHOULD BE OF GRADE M20 (NOMINAL MIX 1:1.5:3), AND REINFORCING STEEL SHOULD CONFORM FE-500 AS PER IS: 1786.
4. FOUNDATION BED SHOULD BE WELL COMPACTED BEFORE LAYING OF CONCRETE.
5. EXPOSED SURFACE OF THE FOUNDATION UP TO 400 MM BELOW FINISHED GROUND LEVEL (G.L.) SHOULD BE PROVIDED WITH 10 MM THICK PLASTER (1:4) AND NEAT CEMENT PUTTING.
6. FOUNDATION BOTTOM AND SIDE WALL SHOULD HAVE CLEAR COVER OF 50 MM AND PEDESTAL SHOULD HAVE CLEAR COVER OF 40 MM.
7. HOLE DIA - 12MM, FOUNDATION BOLT - M10
8. THE HOLE CENTRE DISTANCES SHOWN ARE AS PER G.A. DRAWING. HOWEVER, BEFORE MAKING HOLES IN CHANNELS THESE DIMENSIONS SHOULD BE CHECKED AND VERIFIED WITH THE ACTUAL.
9. THIS DRAWING IS PREPARED BASED ON 4 WAY RMU G.A. DRAWING & FOUNDATION DRAWING OF M/S SIEMENS (DRG. NOS. 502_9883_9 AND 502_8583_9).

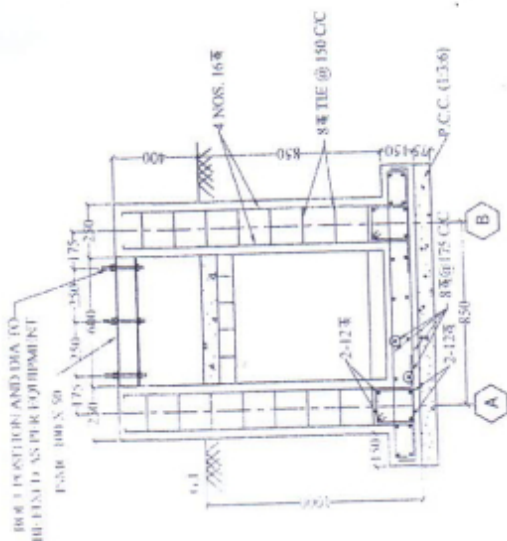


SECTION B-B
SCALE: 1:25

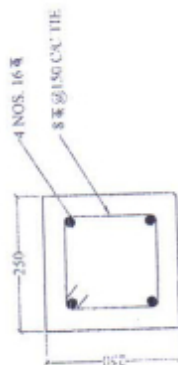


TYPICAL SECTION OF COLUMN
SCALE: 1:10

X - HOLE CENTRE

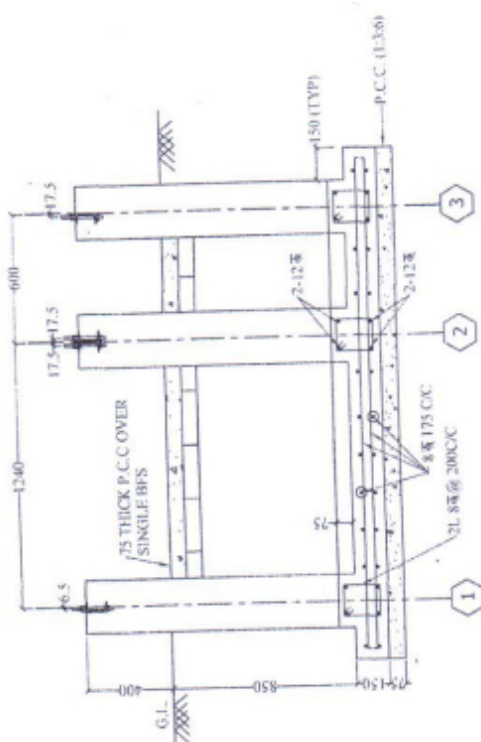

SECTION A-A
SCALE: 1:25

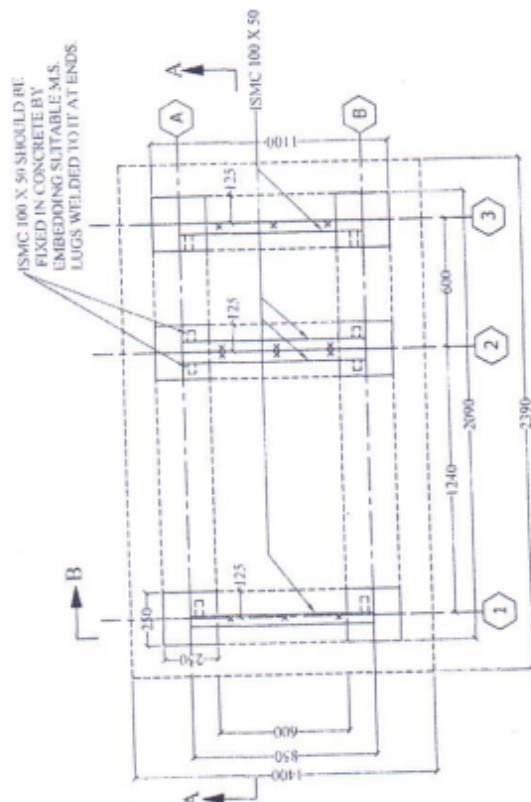

FOUNDATION PLAN
SCALE: 1:25

REF: 1. LKO NOTE NO. CF/Inst. Project-IHANS-680 DATED 08.06.2019


IN CASE OF ANY CONFUSION PLEASE CONSULT DIST. P. & E. DEPTT.

REVISIONS	W/SE/DCL	DISTRIBUTION HQ.
		PLANNING AND ENGINEERING
		FOUNDATION DETAIL OF SCADA COMPATIBLE SIEMENS MAKE RMU - 4 WAY
DRAWN BY:	SR S.A.E.(C)	DRAWING NO. PLN(D)/SS/133
DESIGNED BY:	SR S.A.E.(C)	SCALE AS STATED
CHECKED BY:	SR S.A.E.(C)	DATE: 17.06.2019
RECOMMENDED BY:	SR S.A.E.(C)	REV. NO. 0
APPROVED BY:	SR S.A.E.(C)	

1. ALL DIMENSIONS ARE IN MILLIMETER, UNLESS OTHERWISE STATED.
2. FIGURED DIMENSIONS SHOULD BE FOLLOWED.
3. REINFORCED CONCRETE SHOULD BE OF GRADE M20 (NOMINAL MIX 1:1:3), AND REINFORCING STEEL SHOULD CONFORM FE-500 AS PER IS: 1786.
4. FOUNDATION BED SHOULD BE WELL COMPACTED BEFORE LAYING OF CONCRETE.
5. EXPOSED SURFACE OF THE FOUNDATION UPTO 400 MM BELOW FINISHED GROUND LEVEL (G.L.) SHOULD BE PROVIDED WITH 10 MM THICK PLASTER (1:4) AND NEAT CEMENT FINISHING.
6. FOUNDATION BOTTOM AND SIDE WALL SHOULD HAVE CLEAR COVER OF 50 MM AND PEDESTAL SHOULD HAVE CLEAR COVER OF 40 MM.
7. HOLE DIA. - 12MM, FOUNDATION BOLT - M10
8. THE HOLE CENTRE DISTANCES SHOWN ARE AS PER G.A DRAWING OF RMU. HOWEVER, BEFORE MAKING HOLES IN CHANNELS THESE DIMENSIONS SHOULD BE CHECKED AND VERIFIED WITH THE ACTUAL. FOR FIXING RTU ON CHANNELS, HOLES SHOULD BE MADE AS PER ACTUAL.
9. THIS DRAWING IS PREPARED BASED ON 4 WAY RMU G.A DRAWING & FOUNDATION DRAWING OF MS SIEMENS (ORG. NOS: 502_9993_9 and 502_9583_3).
10. FOR PREPARATION OF THE DRAWING MS SIEMENS MAKE RTU HAS BEEN CONSIDERED.



X-HOLE CENTRE



THIS DRAWING SUPERSEDES EARLIER DRAWING NO. PLN(D)SS/131 DATED 15.05.2019

IN CASE OF ANY COMPLETION PLEASE CONSULT DIST. P. & E. DEPTT.

REVISIONS		DISTRIBUTION HQ.	
		PLANNING AND ENGINEERING	
		COMBINED FOUNDATION OF SCADA COMPATIBLE RMU 4 WAY (SIEMENS MAKE) AND FRTU (SIEMENS MAKE)	
	DRAWN BY :	 S. S. A. E. (D)	DRAWING NO. PLN(D)/SS/137
	DESIGNED BY :	 S. S. A. E. (D)	
	CHECKED BY :	 S. S. A. E. (D)	SCALE: AS STATED
	RECOMMENDED BY :	 S. S. A. E. (D)	DATE: 04.07.2019
	APPROVED BY :	 S. S. A. E. (D)	REV. NO. 0